

# Nimonic® 115 Superalloy

Smiths High Performance



Revision: SHP/english/datasheets/nimonic-115/11.02.2025

Page: 1 of 2

## Offering High Surface Stability

Our nickel-chromium-based alloy introduces molybdenum, titanium and aluminium for additional strength.

Nimonic® 115 is a precipitation-hardenable alloy available for supply in bar form and extruded sections.

The material is a creep-resisting alloy, initially developed for high-temperature service operation up to 1010°C. The product's original intended application was producing gas turbine blades, offering superior oxidation resistance and high-temperature strength.

Heat treatment of the product is by solution treatment and then ageing. The density of the product is 7.85 g/cc.

## Forming & Machining:


Nimonic® 115 has good ductility; forming is, therefore, superior, although powerful equipment is needed as the alloy has greater strength when compared to standard steels. Thorough cleaning after forming is required as lubricant residues can cause future embrittlement of the alloy. The alloy is machined using conventional machining methods and is work hardened during the machining process. Processing at high speeds requires a water-based coolant.

## Product Availability:

Round bar and plate

## About Smiths High Performance

Smiths High Performance is a leading stockholder and supplier of high-performance engineering materials. We are material supply chain partners supporting high-technology market sectors.

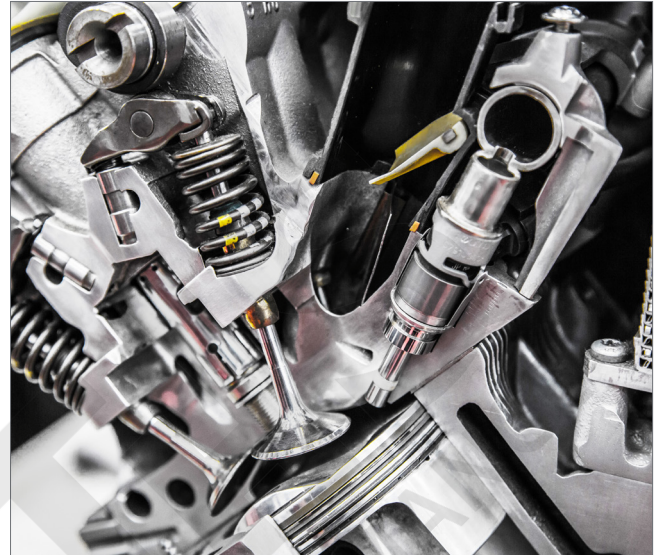

## In Motorsport:

This superalloy offers a unique combination of high temperature and mechanical strength and is suitable for motorsport applications requiring high surface stability. Exhaust valves, fasteners, springs and engine components are good examples of where the alloy is suitable.

## Welding:

We recommend using an alloy filler for welding - this can either be an exact alloy match or a filler with high nickel, cobalt, molybdenum and chromium content.

Suitable welding techniques include gas metal-arc welding, gas-tungsten arc welding, submerged-arc welding and shielded metal-arc welding.

Further technical data available on the reverse of this Datasheet



SCAN ME

# Nimonic® 115 Superalloy

Smiths High Performance



Revision: SHP/english/datasheets/nimonic-115/11.02.2025

Page: 2 of 2

## Chemical Composition (weight, %)

	Bal
Nickel	
Chromium	14.00 - 16.00
Cobalt	13.00 - 15.50
Aluminium	4.50 - 5.50
Molybdenum	3.00 - 5.00
Titanium	3.50 - 4.50
Iron	1.00
Manganese	1.00
Silicon	1.00
Copper	0.20
Zirconium	0.15
Carbon	0.12 - 0.20
Sulphur	0.015
Boron	0.010 - 0.025
Lead	0.0015

## Mechanical Properties

Precipitation hardened, prior to test

Tensile Strength	1140 MPa (@ 550°C) 1300 MPa (@ 23°C)
Tensile Strength, Yield (@Strain 0.200%)	720 MPa (@ 550°C) 850 MPa (@ room temperature)
Elongation at Break	25% (precipitation hardened) 20% (@ 550°C)

## Product Benefits:

- High tensile and yield strength
- Superior high-temperature strength
- Good ductility
- For high-temperature service applications
- High creep resistance
- Available in round bar and plate

## In Motorsport:

- Engine components
- Valve components
- Springs
- Fasteners

Nimonic® 115 is suitable for motorsport applications where a combination of high-temperature service and mechanical strength is a core requirement.

## ...where performance matters...

When you purchase high-performance materials from **Smiths High Performance**, you will join some of the biggest and best global engineering companies. We are a Tier 1 supply chain partner to the world's leading motorsport companies. Our unique business structure and ethos allow us to offer services otherwise unavailable in this market sector.

[www.smithshp.com](http://www.smithshp.com)
[info@smithshp.com](mailto:info@smithshp.com)


Unit 3, Juno Place  
Stratton Business Park  
Biggleswade SG18 8XP

Tel: +44 (0)1767 604 708



All information in our data sheet is based on approximate testing and is stated to the best of our knowledge and belief. It is presented apart from contractual obligations and does not constitute any guarantee of properties or of processing or application possibilities in individual cases. Our warranties and liabilities are stated exclusively in our terms of trading.