


## High conductivity & high strength

Berylco 14 (also known as Alloy 3) is a high conductivity beryllium copper alloy which is ideal for applications requiring a combination of strength with high thermal conductivity.

Offering corrosion-resistant characteristics similar to pure copper, Berylco 14 is fully heat-treated, and therefore, no further treatments are required. The resulting material is non-magnetic and thermal fatigue is excellent. The general machinability and brazing characteristics of the alloy is also good. Weldability of the alloy is considered to be only fair though Berylco 14 is highly weldable to copper.

The material is stronger when compared to other copper alloys with superior structural strength.

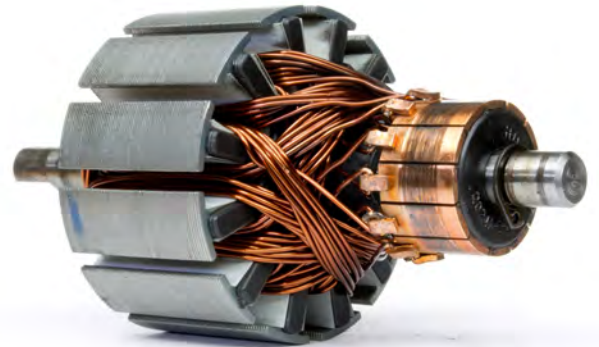

## Motorsport / Automotive Uses

Traditional applications for Alloy 3 include oil and gas applications, particular in long-reach power and signal solutions. Due to the materials high conductivity and strength, Berylco 14 also offers a variety of motorsport and automotive applications which include:

- Engine compartment connectors
- Switches
- Sensor terminals
- Coaxial connectors
- Signal connectors
- Any environment where a degree of thermal management is required

## Product Availability

Bar, plate and wire

## About Smiths High Performance

Smiths High Performance is a leading stockholder and supplier of high-performance engineering materials to the global motorsport sector. We are supply partners in a range of specialist motorsport markets including Formula 1, Formula E, NASCAR, MOTO GP, WEC & WRC.

Further technical data available on the reverse of this Datasheet

## Weldability

Berylco 14 resists stress corrosion cracking in both sulphide and chloride solutions. It is corrosion resistant to most organic solutions, saltwater atmosphere, non-oxidising acids and diluted alkalis and is not susceptible to hydrogen embrittlement. Use with strong oxidising acids or ammonium hydroxide is not recommended.

## Product Benefits

- High electrical conductivity
- Superior strength when compared to other copper alloys
- Good resistance to stress relaxation
- Very good machinability
- Non-magnetic

## Chemical Composition (%)

Beryllium	0.2 - 0.6	Nickel	1.8 - 2.2	Copper plus additions	99.5
-----------	-----------	--------	-----------	-----------------------	------

## Mechanical Properties

Temper	A (TB00)	H (TD04)	AT (TF00)	HT (TH04)
Tensile Strength ksi	35-55	65-80 1	00-130	115-140
Tensile Strength MPa	240-380	450-550	690-895	793-960
0.2% Yield Strength ksi min.	25	55	80	110
0.2% Yield Strength MPa min.	170	380	550	760
Elongation in 4D% min.	30	10	10	10
Hardness Rockwell	B 50 max	B 60-80	B 92-100	B 95-102
Electrical Conductivity %IACS min.	20	20	45	48
Typical Age Hardening	—	—	3 hrs. @840-900°F	2 hrs. @840-900°F

## Physical Properties (typical)

Density lbs./in3 @ 68°F	.317
Coefficient of Thermal expansion 68°F to 390°F	10.0 x 10-6
Thermal Conductivity BTU/(ft. x hr. x °F) @ 68°F	145
Electrical Conductivity %IACS @ 68°F	48
Thermal Capacity (specific heat) BTU/(lb. x °F) @ 68°F	0.1
Modulus of elasticity psi	19.2 x 106
Modulus of rigidity (Torsion Modulus) psi	7.5 X 106
Magnetic permeability	
Machinability	40

...where performance matters...

When you purchase high-performance materials from **Smiths High Performance**, you will be joining some of the biggest and best global engineering companies. We are a Tier 1 supply chain partner to the world's leading motorsport companies. Our unique business structure and ethos allows us to offer services which are otherwise unavailable in this market sector.

[www.smithshp.com](http://www.smithshp.com)

[info@smithshp.com](mailto:info@smithshp.com)



Unit 3, Juno Place, Stratton Business Park,  
Biggleswade, Bedfordshire SG18 8XP

t +44 (0) 1767 604 708   
 Y [info@smithshp.com](mailto:info@smithshp.com)  
f +44 (0) 1767 312 885   
 k [www.smithshp.com](http://www.smithshp.com)



1930